

IMPACT SOCKETS & ACCESSORIES



Oil & Gas Industry | Automotive | Refineries | Offshore
Construction | Windmills

+91 - 90046 03489


www.torquingtools.com

+91 - 83558 75670


info@torquingtools.com

IMPACT SOCKETS


STANDARD & LONG



6pt. STD Socket



12t. STD Socket



Long Socket

1/4" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weight gm	L mm	Weight gm
	mm	Inch							
9TS-104	4		7.6	13	23	10	14	50	29
9TS-104I		3/16"	8.5	13	23	10	14	50	29
9TS-105	5		8.8	13	23	10	14	50	29
9TS-105I		7/32"	9.5	13	23	10	14	50	29
9TS-106	6		10	13	23	10	14	50	29
9TS-106I		1/4"	10.3	13	23	10	14	50	29
9TS-107	7		11.3	13	23	10	14	50	29
9TS-107I		9/32"	11.3	13	23	10	14	50	29
9TS-108I		5/16"	12.5	13	23	10	14	50	29
9TS-108	8		12.5	13	23	10	14	50	29
9TS-109I		11/32"	13.8	13	23	10	15	50	31
9TS-109	9		13.8	13	23	10	15	50	31
9TS-110I		3/8"	15	13	23	10	15	50	31
9TS-110	10		15	13	23	10	15	50	31
9TS-111	11		16.3	13	23	10	18	50	37
9TS-111I		7/16"	16.3	13	23	10	18	50	37
9TS-112	12		17	13	23	12	19	50	39
9TS-112I		1/2"	18.8	13	23	12	19	50	39
9TS-113	13		18.8	13	23	12	19	50	39
9TS-114	14		20	13	23	13	22	50	45
9TS-114I		9/16"	20	13	23	13	22	50	45
9TS-115	15		21	13	23	13	23	50	45

9TS-114 / 9TS-114I 9T :- 9 TORC | S :- Standard | 1 :- 1/4" Drive | 14 :- A/F | I :- Inches

For long socket, Replace "S" by "L". For Example :- (9TS-114 To 9TL-114)

3/8" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weigh ht gm	L mm	Weigh t gm
	mm	Inch							
9TS-206	6		11	19	30	10	40	57	80
9TS-207	7		12.5	19	30	10	40	65	80
9TS-208	8		14.5	19	30	10	40	65	80
9TS-209	9		15	19	30	10	40	65	80
9TS-209I		3/8"	14.5	19	30	10	40	65	80
9TS-210	10		16	19	30	10	40	65	80
9TS-211	11		17.5	19	30	12	40	65	80
9TS-211I		7/16"	17	19	30	12	40	65	80
9TS-212	12		19	19	30	12	40	65	80
9TS-212I		1/12"	19	19	30	12	40	65	80
9TS-213	13		19	22	30	12	60	65	120
9TS-214	14		21	22	30	13	60	65	120
9TS-214I		9/16"	20	22	30	13	40	65	120
9TS-215	15		22	22	30	15	60	65	120
9TS-215I		5/8"	24	24	30	15	60	65	130
9TS-216	16		24	22	30	15	60	65	130
9TS-217	17		25	22	30	15	60	65	130
9TS-217I		11/16"	24	24	30	15	60	65	130
9TS-218	18		26	22	30	16	60	65	150
9TS-219	19		27	22	30	16	70	65	150
9TS-219I		3/4"	27	22	30	16	70	65	150
9TS-220	20		28	22	30	16	70	65	150
9TS-220I		13/16"	28	28	30	16	70	65	160
9TS-221	21		30	22	30	18	70	65	180
9TS-222	22		32	23	30	18	100	65	200
9TS-222I		7/8"	30	30	30	18	100	65	200
9TS-223	23		32	23	30	18	100	65	200

9TS-222 / 9TS-222I 9T :- 9 TORC | S :- Standard | 2 :- 3/8" Drive | 22 :- A/F | I :- Inches

For long socket, Replace "S" by "L". For Example :- (9TS-222 To 9TL-222)

1/2" Square Drive


PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weigh t gm
	mm	Inch							
9TS-308	8		15	25	38	10	60	78	160
9TS-309	9		16	25	38	10	85	78	160
9TS-309I		3/8"	16	25	38	10	85	78	140
9TS-310	10		17	25	38	10	90	78	160
9TS-311	11		19	25	38	12	90	78	160
9TS-311I		7/16"	18	25	38	12	90	78	140
9TS-312	12		20	25	38	12	90	78	170
9TS-312I		1/2"	20	25	38	12	90	78	140
9TS-313	13		21	25	38	12	90	78	170
9TS-314	14		22	25	38	13	90	78	170
9TS-314I		9/16"	22	25	38	13	90	78	200
9TS-315	15		24	30	38	14	130	78	240
9TS-315I		5/8"	25	25	38	14	80	78	200
9TS-316	16		25	30	38	14	130	78	250
9TS-317	17		26	30	38	14	130	78	250
9TS-317I		11/16"	25	25	38	14	80	78	190
9TS-318	18		27.5	30	38	14	130	78	260
9TS-319	19		27.5	30	38	16	130	78	250
9TS-319I		3/4"	27.5	30	38	16	130	78	250
9TS-320	20		30	30	38	16	130	78	280
9TS-320I		13/16"	30	30	38	16	130	78	280
9TS-321	21		30	30	38	18	130	78	250
9TS-322	22		32	30	38	18	140	78	280
9TS-322I		7/8"	32	30	38	18	140	78	280
9TS-323	23		32	30	38	18	140	78	280
9TS-323I		15/16"	35	30	38	18	160	78	300
9TS-324	24		35	30	45	21	170	78	300
9TS-325	25		35	30	45	21	170	78	300
9TS-325I		1"	35	30	38	21	200	78	380
9TS-326	26		38	30	50	21	200	78	380
9TS-327	27		38	30	50	23	260	78	430
9TS-327I		1.1/16"	38	30	50	23	260	78	430
9TS-328	28		38	30	50	23	260	78	430
9TS-328I		1.1/8"	38	30	40	23	220	78	480
9TS-329	29		41	30	50	23	290	78	430
9TS-330	30		41	30	50	24	290	78	480
9TS-330I		1.3/16"	41	30	50	24	290	78	430
9TS-331	31		44	30	50	24	290	78	500
9TS-331I		1.1/4"	44	35	40	24	240	78	500
9TS-332	32		44	30	50	26	300	78	500
9TS-333	33		45	30	50	26	300	78	550
9TS-333I		1.5/16"	45	35	43	26	260	78	550
9TS-334	34		49	35	46	26	300	78	600
9TS-335	35		49	38	50	26	300	78	600
9TS-335I		1.3/8"	49	38	50	28	300	78	600
9TS-336	36		49	35	50	28	300	78	600
9TS-336I		1.7/16"	49	38	50	28	300	78	600
9TS-337	37		52	38	50	28	400	78	790
9TS-338	38		52	38	50	28	400	78	790
9TS-338I		1.1/2"	52	38	50	30	400	78	790

9TS-338 / 9TS-338I 9T :- 9 TORC | S :- Standard | 3 :- 1/2" Drive | 38 :- A/F | I :- Inches


For long socket, Replace "S" by "L". For Example :- (9TS-338 To 9TL-338)

IMPACT SOCKETS


STANDARD & LONG



6pt. STD Socket



12t. STD Socket



Long Socket

3/4" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-414	14		25	44	45	13	295	90	755
9TS-414I		9/16"	25	44	45	13	295	90	755
9TS-415	15		29	44	45	14	295	90	755
9TS-414I		5/8"	29	44	45	14	295	90	755
9TS-416	16		29	44	45	14	295	90	755
9TS-417	17		29	44	45	14	295	90	755
9TS-417I		11/16"	29	44	45	14	295	90	755
9TS-418	18		32	44	45	14	295	90	755
9TS-419	19		32	44	45	16	295	90	755
9TS-419I		3/4"	32	44	45	16	295	90	755
9TS-420	20		35	44	46	16	345	90	755
9TS-420I		13/16"	35	44	46	16	345	90	755
9TS-421	21		35	44	46	16	345	90	755
9TS-422	22		38	44	46	18	345	90	755
9TS-422I		7/8"	38	44	46	18	345	90	755
9TS-423	23		38	44	46	18	345	90	755
9TS-423I		15/16"	40	44	46	18	345	90	755
9TS-424	24		40	44	46	21	345	90	755
9TS-425I		1"	41	44	46	21	345	90	755
9TS-427	27		41	44	48	23	385	90	755
9TS-427I		1.1/16"	41	44	48	23	385	90	755
9TS-428I		1.1/8"	44	44	52	23	385	90	695
9TS-430	30		44	44	52	24	425	90	695
9TS-430I		1.3/16"	44	44	52	24	425	90	695
9TS-431I		1.1/4"	49	44	52	24	425	90	785
9TS-432	32		49	44	52	26	435	90	785
9TS-433I		1.5/16"	49	44	55	26	435	90	785
9TS-435I		1.3/8"	52	44	55	26	465	90	805
9TS-436	36		52	44	55	28	465	90	805
9TS-436I		1.7/16"	52	44	56	28	465	90	805
9TS-438I		1.1/2"	54	44	59	30	525	90	855
9TS-441	41		57	44	59	36	555	90	1025
9TS-441I		1.5/8"	57	44	59	36	555	90	1025
9TS-443I		1.11/16"	63	44	64	36	600	90	1025
9TS-446	46		67	44	64	36	855	90	1355
9TS-446I		1.13/16"	67	44	64	36	855	90	1355
9TS-447I		1.7/8"	67	54	67	36	915	90	1405
9TS-449I		1.15/16"	70	54	67	36	955	90	1505
9TS-450	50		70	54	67	39	1045	90	1505
9TS-451I		2"	73	54	67	39	1045	90	1505
9TS-452I		2.1/16"	73	54	0	39	1045	94	1505
9TS-455	55		78	54	71	41	1205	94	1805
9TS-455I		2.3/16"	78	54	71	41	1205	94	1905
9TS-457I		2.1/4"	82	54	74	41	1325	98	1905
9TS-460	60		86	60	75	45	1325	98	2040
9TS-461I		2.3/8"	86	60	75	45	1325	98	2040

9TS-460 / 9TS-460I 9T :- 9 TORC | S :- Standard | 4 :- 3/4" Drive | 60 :- A/F | I :- Inches


For long socket, Replace "S" by "L". For Example :- (9TS-460 To 9TL-460)

1" Square Drive


PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-519	19		36	54	55	16	605	100	1205
9TS-519I		3/4"	36	54	55	13	605	100	1205
9TS-520	20		37	54	55	16	605	100	1205
9TS-520I		13/16"	38	54	55	16	605	100	1205
9TS-521	21		38	54	55	16	605	100	1205
9TS-522	22		40	54	55	18	605	100	1205
9TS-522I		7/8"	40	54	55	18	605	100	1205
9TS-523	23		41	54	55	18	605	100	1205
9TS-523I		15/16"	41	54	55	18	605	100	1205
9TS-524	24		42	54	55	21	605	100	1205
9TS-525I		1"	43	54	55	21	605	100	1205
9TS-527	27		46	54	55	23	605	100	1205
9TS-527I		1.1/16"	46	54	55	23	605	100	1205
9TS-528I		1.1/8"	48	54	57	23	635	100	1205
9TS-530	30		50	54	57	24	635	100	1205
9TS-530I		1.3/16"	50	54	57	24	635	100	1205
9TS-531I		1.1/4"	51	54	57	24	635	100	1205
9TS-532	32		51	54	57	26	635	100	1205
9TS-533I		1.5/16"	54	54	60	26	655	100	1205
9TS-535I		1.3/8"	54	54	60	26	655	100	1205
9TS-536	36		54	54	60	28	655	100	1205
9TS-536I		1.7/16"	54	54	60	28	655	100	1205
9TS-538I		1.1/2"	60	54	64	30	765	100	1305
9TS-541	41		63	54	64	36	805	100	1405
9TS-541I		1.5/8"	63	54	64	36	805	100	1405
9TS-543I		1.11/16"	67	54	69	36	955	100	1505
9TS-546	46		70	54	69	36	1005	100	1605
9TS-546I		1.13/16"	70	54	69	36	1005	100	1605
9TS-547I		1.7/8"	70	54	72	36	1005	100	1605
9TS-549I		1.15/16"	73	54	72	36	1085	100	1705
9TS-550	50		73	54	72	36	1085	100	1705
9TS-551I		2"	73	54	72	39	1085	100	1705
9TS-552I		2.1/16"	78	54	76	39	1245	100	1905
9TS-555	55		82	54	80	41	1245	105	1905
9TS-555I		2.3/16"	82	54	80	41	1405	105	2205
9TS-557I		2.1/4"	82	54	80	41	1405	105	2205
9TS-560	60		86	54	82	45	1505	112	2505
9TS-560I		2.3/8"	86	54	82	45	1505	112	2505
9TS-562I		2.7/16"	92	54	85	45	1805	118	3005
9TS-565	65		92	54	85	46	1805	118	3005
9TS-565I		2.9/16"	92	54	85	46	1805	118	3005
9TS-567I		2.5/8"	92	54	88	46	1805	118	3005
9TS-570	70		96	54	88	50	1805	124	3205
9TS-570I		2.3/4"	96	54	88	50	1805	124	3205
9TS-572I		2.13/16"	100	86	92	50	2705	124	4305
9TS-575	75		100	86	92	57	2705	124	4305
9TS-575I		2.15/16"	100	86	92	57	2705	124	4305
9TS-576I		3"	105	86	97	57	3205	130	4805
9TS-579I		3.1/8"	105	86	97	57	3205	132	4805
9TS-580	80		105	86	97	62	3205	132	4805
9TS-585	85		115	86	100	62	3505	132	5205
9TS-586I		3.3/8"	115	86	104	62	3505	140	6005
9TS-588I		3.1/2"	121	86	104	62	4125	140	7005
9TS-590	90		127	86	104	62	4405	140	7205
9TS-595	95		135	86	106	62	5205	140	7605
9TS-595I		3.3/4"	135	86	106	62	5205	143	7605
9TS 597I		3.7/8"	135	86	112	62	5205	143	7605

IMPACT SOCKETS


STANDARD & LONG



6pt. STD Socket



12t. STD Socket



Long Socket

1" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-5100	100		135	86	112	62	5205	143	7605
9TS-5105	105		145	127	112	62	7705	143	10505
9TS-5105I		4.1/8"	145	127	112	62	7705	149	10505
9TS-5107I		4.1/4"	145	127	122	62	8105	149	11205
9TS-5110	110		150	127	122	62	8205	149	11205
9TS-5114I		4.1/2"	155	130	125	65	8300	149	
9TS-5115	115		155	130	125	65	8300	149	12500

9TS-5115 / 9TS-5115I | 9T :- 9 TORC | S :- Standard | 5 :- 1" Drive | 115 :- A/F | 1 :- Inches

For long socket, Replace "S" by "L". For Example :- (9TS-5115 To 9TL-5115)

1.1/2" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-627I		1.1/16"	54	86	80	23	1841	130	5406
9TS-628I		1.1/8"	58	86	80	23	1841	130	5406
9TS-635I		1.3/8"	64	86	80	23	1841	130	5406
9TS-636	36		64	86	80	28	2249	130	5406
9TS-636I		1.7/16"	64	86	80	28	2249	130	5406
9TS-638I		1.1/2"	69	86	80	28	2249	130	5406
9TS-641	41		69	86	83	32	2249	130	5406
9TS-641I		1.5/8"	69	86	83	36	2249	130	5406
9TS-643I		1.11/16"	69	86	83	36	2249	130	5406
9TS-646	46		76	86	86	36	2249	130	5406
9TS-646I		1.13/16"	76	86	86	36	2249	130	5406
9TS-647I		1.7/8"	76	86	86	36	2351	130	5406
9TS-650	50		81	86	90	39	2351	130	5406
9TS-651I		2"	81	86	90	39	2351	130	5406
9TS-652I		2.1/16"	81	86	90	39	2351	140	5406
9TS-655	55		88	86	95	41	2555	140	5406
9TS-655I		2.3/16"	88	86	95	41	2555	140	5406
9TS-657I		2.1/4"	88	86	95	41	2861	140	5406
9TS-660	60		96	86	98	45	2861	140	5526
9TS-660I		2.3/8"	96	86	98	45	3269	140	5526
9TS-662I		2.7/16"	96	86	98	45	3269	140	5526
9TS-665	65		102	86	102	46	3421	140	5886
9TS-665I		2.9/16"	102	86	102	46	3421	140	5886
9TS-667I		2.5/8"	102	86	102	46	3421	140	5886
9TS-670	70		108	86	102	50	3677	150	6006
9TS-670I		2.3/4"	108	86	102	50	3677	150	6006
9TS-672I		2.13/16"	108	86	102	50	3677	150	6006
9TS-675	75		116	86	108	57	3983	150	6726
9TS-675I		2.15/16"	116	86	108	57	3983	150	6726
9TS-676I		3"	112	86	108	57	4595	150	7086
9TS-679I		3.1/8"	120	86	110	62	4595	150	7086
9TS-680	80		120	86	110	62	4595	150	7086
9TS-685	85		130	86	115	62	6126	170	7446
9TS-686I		3.3/8"	130	86	115	62	6126	170	7446
9TS-688I		3.1/2"	135	125	118	65	6726	170	8166
9TS-690	90		135	125	118	65	6726	170	8166
9TS-695	95		140	125	123	70	9486	170	11886
9TS-695I		3.3/4"	140	125	123	70	9486	170	11886
9TS-697I		3.7/8"	148	125	128	75	10206	190	12846

1.1/2" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-6100	100		148	125	128	75	10206	190	12846
9TS-6105	105		155	125	133	80	11406	190	14286
9TS-6105I		4.1/8"	155	125	133	80	11406	190	14286
9TS-6107I		4.1/4"	155	125	133	80	12246	190	14286
9TS-6110	110		161	150	138	85	12486	200	15006
9TS-6114I		4.1/2"	161	150	143	94	12606	200	15006
9TS-6115	115		161	150	143	94	12606	200	15006
9TS-6117I		4.5/8"	175	150	149	94	14600	200	18010
9TS-6120	120		175	150	149	94	14600	200	18010

9TS-6120 / 9TS-6120I | 9T :- 9 TORC | S :- Standard | 5 :- 1.1/2" Drive | 120 :- A/F | 1 :- Inches


For long socket, Replace "S" by "L". For Example :- (9TS-6120 To 9TL-6120)

2.1/2" Square Drive


PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-760	60		120	125	120	45	8406	190	13206
9TS-760I		2.3/8"	120	125	120	45	8406	190	13206
9TS-765	65		125	125	120	46	8406	190	13206
9TS-765I		2.9/16"	125	125	120	46	8406	190	13206
9TS-770	70		130	125	120	50	8406	190	13206
9TS-770I		2.3/4"	130	125	120	50	8406	190	13206
9TS-775	75		130	125	130	57	9126	190	13206
9TS-775I		2.15/16"	130	125	130	57	9126	190	13206
9TS-779I		3.1/8"	135	125	140	62	9126	190	13206
9TS-780	80		135	125	140	62	9606	190	13206
9TS-785	85		140	125	140	62	9606	190	15006
9TS-786I		3.3/8"	140	125	140	62	9606	190	15006
9TS-790	90		145	125	140	65	9726	190	15006
9TS-795	95		155	125	150	70	9846	190	15006
9TS-795I		3.3/4"	155	125	150	70	9846	200	15006
9TS-797I		3.7/8"	155	125	150	70	10806	200	16806
9TS-7100	100		160	125	150	75	10806	200	16806
9TS-7105	105		165	125	160	80	10806	210	18606
9TS-7105I		4.1/8"	165	125	160	80	10806	210	18606
9TS-7110	110		174	150	160	85	13206	210	20406
9TS-7110I		4.3/8"	174	150	160	85	13206	210	20406
9TS-7114I		4.1/2"	180	150	170	90	13806	220	21606
9TS-7115	115		180	150	170	90	13806	220	21606
9TS-7117I		4.5/8"	180	150	175	90	14406	220	22806
9TS-7120	120		185	150	175	94	14406	220	22806
9TS-7120I		4.3/4"	185	150	175	94	14406	220	22806
9TS-721I		4.7/8"	185	150	175	94	14406	220	22806
9TS-725I		5"	195	150	175	98	16926	220	24006
9TS-7130	130		195	150	175	98	16926	220	24006
9TS-7135	135		205	150	180	102	16926	230	26406
9TS-7135I		5.3/8"	205	150	180	102	20406	250	26406
9TS-7145	145		220	150	180	105	24006	250	31206
9TS-7145I		5.3/4"	220	150	180	105	24006	250	31206
9TS-7150	150		230	180	190	110	26406	-	31206
9TS-7155	155		230	180	190	110	26406	-	31206
9TS-7155I		6.1/8"	230	180	190	110	26406	-	31206
9TS-7160	160		240	180	190	110	27606	-	39606

IMPACT SOCKETS


STANDARD & LONG

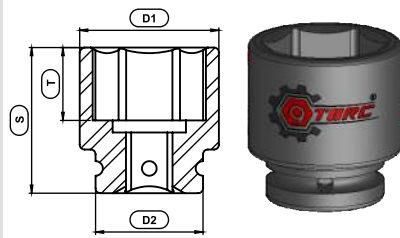

6pt. STD Socket

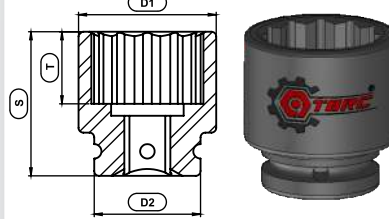

12t. STD Socket

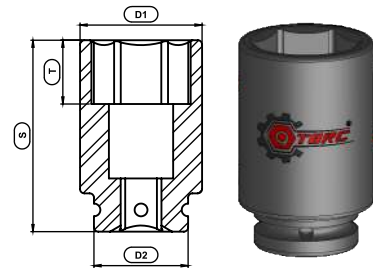

Long Socket

2.1/2" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-7165	165		240	180	200	120	36006	-	39606
9TS-7165I		6.1/2"	240	180	200	120	36006	-	39606
9TS-7175I		6.7/8"	255	180	200	120	38406	-	49206
9TS-7175	175		255	180	200	120	38406	-	49206
9TS-7185	185		270	180	210	130	43206	-	54006
9TS-7185I		7.1/4"	270	180	210	130	43206	-	54006
9TS-7195	195		275	180	210	130	48006	-	66006
9TS-7200	200		290	180	225	140	50100	-	69080
9TS-7200I		8"	290	180	225	140	50100	-	69080

9TS-7200 / 9TS-7200I 9T :- 9 TORC | S :- Standard | 7 :- 2.1/2" Drive | 200 :- A/F | I :- Inches

For long socket, Replace "S" by "L". For Example :- (9TS-7200 To 9TL-7200)

3.1/2" Square Drive


PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weig ht gm	L mm	Weight gm
	mm	Inch							
9TS-8120	120		180	175	182	72	24126	277	38406
9TS-8117I		4.5/8"	180	175	182	72	24126	277	38406
9TS-8121I		4.7/8"	193	175	190	80	26646	280	42006
9TS-8130	130		193	175	190	80	26646	280	42006
9TS-8135	135		197	175	198	83	26646	280	42006
9TS-8135I		5.3/8"	213	175	214	86	39726	295	54726
9TS-8145	145		213	175	214	86	43206	295	54726
9TS-8145I		5.3/4"	213	175	214	86	43206	295	54726
9TS-8150	150		218	175	214	90	43206	295	54726
9TS-8155	155		225	175	214	92	43206	297	60246
9TS-8155I		6.1/8"	225	175	214	92	43206	297	60246
9TS-8160	160		237	175	231	98	48006	313	67206
9TS-8165	165		237	175	231	98	48006	313	67206
9TS-8165I		6.1/2"	237	175	231	98	48006	313	67206
9TS-8170	170		243	175	231	100	55206	313	74406
9TS-8175	175		249	175	231	102	62406	313	84006
9TS-8175I		6.7/8"	249	175	231	102	62406	313	84006
9TS-8180	180		255	175	237	108	62406	320	84006
9TS-8180I		7"	255	175	237	108	62406	320	84006
9TS-8195	195		275	175	245	118	70806	328	98406
9TS-8195I		7.5/8"	275	175	245	118	70806	328	98406
9TS-8200	200		280	175	250	120	84006	332	1E+05
9TS-8200I		8"	280	175	250	120	88806	332	1E+05
9TS-8215	215		298	175	263	125	97206	346	1E+05
9TS-8215I		8.1/2"	298	175	263	125	97206	346	1E+05
9TS-8230	230		317	175	279	132	1E+05	359	1E+05
9TS-8230I		9"	317	175	279	132	1E+05	359	1E+05

9TS-8230 / 9TS-8230I 9T :- 9 TORC | S :- Standard | 8 :- 3.1/2" Drive | 230 :- A/F | I :- Inches


For long socket, Replace "S" by "L". For Example :- (9TS-8230 To 9TL-8230I)

Thin Wall Impact Sockets


STANDARD & LONG

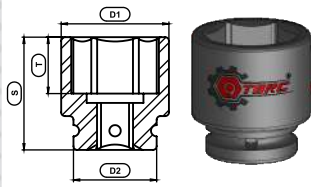

6pt. STD Socket

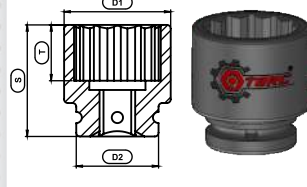

12pt. STD Socket



Long Socket

3/8" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weight gm	L mm	Weight gm
	mm	Inch							
9TST-206	6		9.5	18	34	10	0.03	57	0.05
9TST-207	7		11	18	34	10	0.03	65	0.05
9TST-208	8		12.2	18	34	10	0.03	65	0.05
9TST-209	9		13.5	18	34	10	0.03	65	0.05
9TST-210	10		14.7	18	34	10	0.03	65	0.05
9TST-211	11		16	18	34	12	0.03	65	0.05
9TST-212	12		17.2	18	34	12	0.03	65	0.06
9TST-213	13		18.5	18.5	34	12	0.04	65	0.07
9TST-214	14		19.7	19.7	34	13	0.04	65	0.08
9TST-215	15		21	21	34	15	0.05	65	0.08
9TST-216	16		22.2	22.2	34	15	0.05	65	0.11
9TST-217	17		23.5	23.5	34	15	0.06	65	0.13
9TST-218	18		24.7	24.7	34	16	0.06	65	0.12

9TST-218 / 9TST-218L 9T:- 9 TORC | S:-Standard | T:-Thin Wall | 2:-3/8" Drive | 18:-A/F | L-Inches

For long socket, Replace "S" by "L". For Example :- (9TST-218 To 9TST-218L)

1/2" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weight gm	L mm	Weight gm
	mm	Inch							
9TST-313	13		21	25	38	12	70	78	240
9TST-314	14		22	25	38	13	72	78	240
9TST-314L		9/16"	22	24	38	7	72	78	240
9TST-315	15		24	30	38	7	110	78	240
9TST-315L		5/8"	25	25	38	8	70	78	240
9TST-316	16		25	30	38	8	110	78	240
9TST-317	17		25	30	38	9	110	78	240
9TST-317L		11/16"	25	25	38	9	70	78	130
9TST-318	18		25	30	38	9	110	78	130
9TST-319	19		28	30	38	9.5	110	78	230
9TST-319L		3/4"	28	30	38	9.5	110	78	230
9TST-320	20		28	30	38	10	110	78	230
9TST-320L		13/16"	28	30	38	11	110	78	230
9TST-321	21		30	30	38	11	119	78	230
9TST-322	22		30	30	38	11	119	78	230
9TST-322L		7/8"	30	30	38	13	120	78	230
9TST-323	23		32	30	38	13	140	78	230
9TST-323L		15/16"	33	30	38	13	160	78	230
9TST-324	24		33	30	45	13	160	78	230

9TST-323 / 9TST-323L 9T:- 9 TORC | S:-Standard | T:-Thin Wall | 3:-1/2" Drive | 23:-A/F | L-Inches

For long socket, Replace "S" by "L". For Example :- (9TST-323 To 9TST-323L)

3/4" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weight gm	L mm	Weight gm
	mm	Inch							
17		28	44	45	14	305	90	700	
	11/16"	28	44	45	14	305	90	705	
18		30	44	45	14	305	90	705	
19		30	44	45	16	305	90	705	
	3/4"	30	44	45	16	305	90	705	
20		35	44	46	16	355	90	705	
	13/16"	35	44	46	16	355	90	705	
21		35	44	46	16	355	90	705	
22		35	44	46	18	355	90	705	
	7/8"	35	44	46	18	355	90	705	
23		35	44	46	18	355	90	705	
	15/16"	38	44	46	18	355	90	705	
24		38	44	46	21	355	90	705	
	1"	38	44	46	21	355	90	705	
27		41	44	48	23	355	90	705	
	1.1/16"	41	44	46	23	355	90	705	
	1.1/8"	41	44	52	23	355	90	705	
30		44	44	52	24	355	90	705	
	1.3/16"	44	44	52	24	355	90	705	
	1.1/4"	48	44	52	24	355	90	705	
32		48	44	52	26	425	90	755	
	1.5/16"	48	44	55	26	425	90	755	
	1.3/8"	52	44	55	26	425	90	755	
36		52	44	56	28	455	90	885	
	1.7/16"	52	44	56	28	455	90	885	
	1.1/2"	54	44	59	30	455	90	885	
41		57	44	59	36	455	90	805	
	1.5/8"	57	44	59	36	455	90	805	
	1.11/16"	60	44	64	36	655	90	855	
46		63	44	64	36	705	90	1005	
	1.13/16"	63	44	64	36	705	90	1005	

9TST-446 / 9TST-446L 9T:- 9 TORC | S:-Standard | T:-Thin Wall | 4:-3/4" Drive | 46:-A/F | L-Inches

For long socket, Replace "S" by "L". For Example :- (9TST-446 To 9TST-446L)


1" Square Drive

PART NO.	A/F		D1 mm	D2 mm	S mm	T mm	Weight gm	L mm	Weight gm
	mm	Inch							
9TST-522	22		38	54	55	18	590	100	780
9TST-522L		7/8"	38	54	55	18	590	100	780
9TST-523	23		38	54	55	18	590	100	780
9TST-523L		15/16"	38	54	55	18	590	100	780
9TST-524	24		38	54	55	21	590	100	780
9TST-525L		1"	41	54	55	21	590	100	800
9TST-527	27		44	54	55	23	590	100	800
9TST-527L		1.1/16"	44	54	55	23	590	100	800
9TST-528L		1.1/8"	44	54	55	23	590	100	800
9TST-530	30		44	54	57	24	610	100	800
9TST-530L		1.3/16"	44	54	57	23	610	100	800
9TST-531L		1.1/4"	49	54	57	24	610	100	800
9TST-532	32		49	54	57	26	610	100	800
9TST-533L		1.5/16"	52	54	60	26	620	100	800
9TST-535L		1.3/8"	52	54	60	26	620	100	800
9TST-536	36		54	54	60	28	620	100	950
9TST-536L		1.7/16"	54	54	60	28	620	100	950
9TST-538L		1.1/2"	57	54	64	30	740	100	1100
9TST-541	41		60	54	64	36	780	100	1200
9TST-541L		1.5/8"	60	54	64	36	780	100	1200
9TST-543L		1.11/16"	60	54	69	36	930	100	1300
9TST-546	46		67	54	69	36	980	100	1550
9TST-546L		1.13/16"	67	54	69	36	980	100	1550

9TST-546 / 9TST-546L 9T:- 9 TORC | S:-Standard | T:-Thin Wall | 5:-1" Drive | 46:-A/F | L-Inches

For long socket, Replace "S" by "L". For Example :- (9TST-546 To 9TST-546L)

Hex Bit Socket

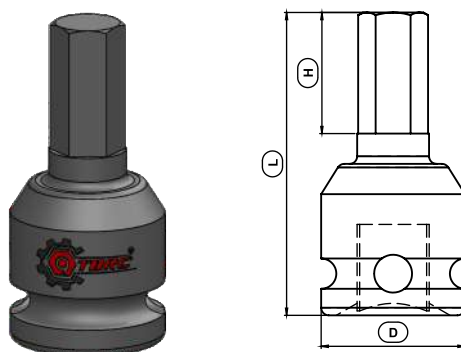

Hex Bit Socket

1/4" HEX BIT

PART NO.	A/F		L mm	H mm
	mm	Inch		
9THB-103	3		41	15
9THB-103I		1/8"	41	15
9THB-104	4		41	15
9THB-104I		5/32"	41	15
9THB-105	5		43	20
9THB-105I		3/16"	43	20
9THB-106I		7/32"	43	20
9THB-107	7		45	25
9THB-107I		1/4"	45	25

9TST-218 / 9TST-218I

9T:- 9 TORC | HB :- Hex Bit | 2:-3/8" Drive | 10:-A/F | I:-Inches

3/8" HEX BIT

PART NO.	A/F		L mm	H mm
	mm	Inch		
9THB-203	3		44	15
9THB-203I		1/8"	44	15
9THB-204	4		44	15
9THB-204I		5/32"	44	15
9THB-205	5		47	20
9THB-205I		3/16"	47	20
9THB-206	6		49	20
9THB-206I		7/32"	49	20
9THB-208	8		49	25
9THB-208I		1/4"	49	25
9THB-210	10		50	25
9THB-210I		3/8"	50	25

9TST-218 / 9TST-218I

9T:- 9 TORC | HB :- Hex Bit | 2:-3/8" Drive | 10:-A/F | I:-Inches

1/2" HEX BIT

PART NO.	A/F		L mm	H mm
	mm	Inch		
9THB-306	6		53	20
9THB-306I		1/4"	53	20
9THB-308	8		53	25
9THB-308I		5/16"	53	25
9THB-310	10		57	25
9THB-310I		3/8"	57	25
9THB-312	12		63	30
9THB-312I		1/2"	63	30
9THB-314	14		63	30
9THB-314I		9/16"	63	30
9THB-317	17		73	40
9THB-317I		5/8"	73	40

9THB-317 / 9THB-317I

9T:- 9 TORC | HB :- Hex Bit | 3:-1/2" Drive | 17:-A/F | I:-Inches

3/4" HEX BIT

PART NO.	A/F		L mm	H mm
	mm	Inch		
9THB-412	12		80	30
9THB-412I		1/2"	80	30
9THB-414	14		80	30
9THB-414I		9/16"	80	30
9THB-417	17		90	40
9THB-417I		5/8"	90	40
9THB-419	19		95	40
9THB-419I		3/4"	95	40
9THB-422	22		95	45
9THB-422I		7/8"	95	45
9THB-424	24		100	50

9THB-422 / 9THB-422I

9T:- 9 TORC | HB :- Hex Bit | 4:-3/4" Drive | 22:-A/F | I:-Inches

1" HEX BIT

PART NO.	A/F		L mm	H mm
	mm	Inch		
9THB-510I		3/8"	81	26
9THB-512I		1/2"	84	30
9THB-514I		9/16"	86	30
9THB-516I		5/8"	98	40
9THB-517	17		100	40
9THB-519	19		107	45
9THB-519I		3/4"	107	45
9THB-522	22		107	45
9THB-522I		7/8"	112	50
9THB-524	24		120	50
9THB-524I		15/16"	120	50
9THB-525I		1"	120	50
9THB-527	27		120	50
9THB-527I		1.1/16"	120	50
9THB-530	30		120	50
9THB-530I		1.1/8"	120	50
9THB-532	32		120	50
9THB-36	36		120	50

9THB-530 / 9THB-530I

9T:- 9 TORC | HB :- Hex Bit | 5:-1" Drive | 30:-A/F | I:-Inches


1.1/2" HEX BIT

PART NO.	A/F		L mm	H mm
	mm	Inch		
9THB-625I		1"	140	50
9THB-628I		1.1/16"	140	50
9THB-630	30		140	50
9THB-630I		1.1/8"	140	50
9THB-632	32		140	50
9THB-632I		1.1/4"	140	50
9THB-636	36		145	55
9THB-638I		1.1/2"	145	55
9THB-641	41		160	60
9THB-641I		1.3/4"	170	70
9THB-646	46		170	70
9THB-650	50		170	70
9THB-650I		2"	170	70

9THB-650 / 9THB-650I

9T:- 9 TORC | HB :- Hex Bit | 6 :- 1.1/2" Drive | 50:-A/F | I:-Inches

Adapter (Female - Male)

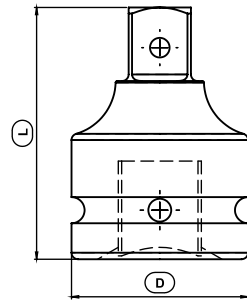

Adapter (Female - Male)

1/4" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-101	1/4" D	1/4"	3/8"	17	27	35

3/8" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-201	3/8" D	3/8"	1/2"	22	33	65

1/2" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-301	1/2" D	1/2"	3/8"	25	38	75
9TAD-302		1/2"	5/8"	25	35	95
9TAD-303		1/2"	3/4"	30	48	185

3/4" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-401	3/4" D	3/4"	1/2"	44	55	345
9TAD-402		3/4"	5/8"	44	57	350
9TAD-403		3/4"	1"	44	59	405

1" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-501	1" D	1"	3/4"	54	77	655
9TAD-502		1"	1.1/2"	54	58	1005
9TAD-503		1"	SPLINE N	54	110	985

1.1/2" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-601	1.1/2" D	1.1/2"	1.1/2"	86	95	2305
9TAD-602		1.1/2"	2.1/2"	86	93	2305
9TAD-603		1.1/2"	SPLINE N	86	138	2305


2.1/2" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-701	2.1/2" D	2.1/2"	1.1/2"	127	138	6565
9TAD-702		2.1/2"	3.1/2"			

3.1/2" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TAD-801	3.1/2" D	3.1/2"	2.1/2"	175	183	15745

Extension Bar

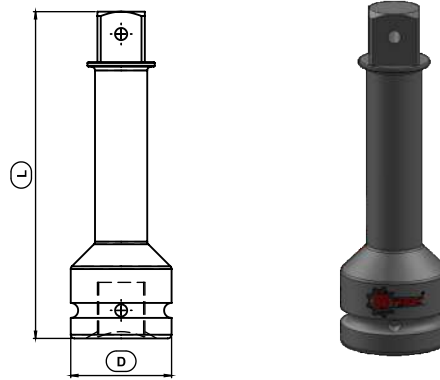

Extension Bar

1/4" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-101		1/4"	1/4"	17	55	85
9TEX-102	1/4"D	1/4"	1/4"	17	100	285
9TEX-103		1/4"	1/4"	17	150	550

3/8" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-201		3/8"	3/8"	19	75	155
9TEX-202		3/8"	3/8"	19	100	195
9TEX-203	3/8" D	3/8"	3/8"	19	125	245
9TEX-204		3/8"	3/8"	19	150	305

1/2" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-301		1/2"	1/2"	30	75	175
9TEX-302	1/2"D	1/2"	1/2"	30	125	250
9TEX-303		1/2"	1/2"	30	250	475

3/4" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-401		3/4"	3/4"	44	75	470
9TEX-402		3/4"	3/4"	44	100	555
9TEX-403	3/4" D	3/4"	3/4"	44	125	695
9TEX-404		3/4"	3/4"	44	175	905
9TEX-405		3/4"	3/4"	44	250	1205
9TEX-406		3/4"	3/4"	44	325	1465

1" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-401		3/4"	3/4"	44	75	470
9TEX-402		3/4"	3/4"	44	100	555
9TEX-403	3/4" D	3/4"	3/4"	44	125	695
9TEX-404		3/4"	3/4"	44	175	905
9TEX-405		3/4"	3/4"	44	250	1205
9TEX-406		3/4"	3/4"	44	325	1465

1" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-601		1.1/2"	1.1/2"	86	150	3985
9TEX-602		1.1/2"	1.1/2"	86	225	4545
9TEX-603	1.1/2" D	1.1/2"	1.1/2"	86	300	5005


1.1/2" Square Drive

PART NO.	TYPE	Female	Male	D mm	L mm	Weight gm
9TEX-601		1.1/2"	1.1/2"	86	150	3985
9TEX-602		1.1/2"	1.1/2"	86	225	4545
9TEX-603	1.1/2" D	1.1/2"	1.1/2"	86	300	5005

1.1/2" Square Drive

SQUARE SIZE			Male	D mm	L mm	Weight gm
PART NO.	TYPE	Female				
9TEX-701		2.1/2"	2.1/2"	104	255	14025
9TEX-702	2.1/2"D	2.1/2"	2.1/2"	104	380	21025
9TEX-703		2.1/2"	2.1/2"	104	510	31025

Stud Runners

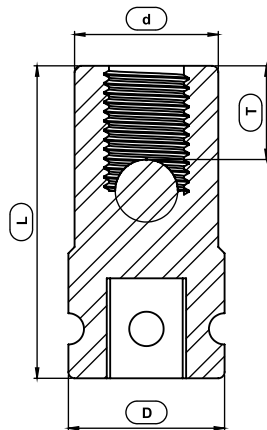

Stud Runners

3/8" Square Drive

PART NO.	A/F mm	PITCH mm	D mm	d mm	L mm	T mm	Weight kg
9TSR-204	4	0.7	12	22	57	5	0.07
9TSR-205	5	0.8	13	22	57	7	0.09
9TSR-206	6	1	14	22	57	8	0.1
9TSR-208	8	1.25	17	22	57	12	0.08
9TSR-210	10	1.5	19	22	57	14	0.09
9TSR-210 9T :- 9 TORC SR :- Stud Runner 2 :- 3/8" Drive 10 :- A/F							

1/2" Square Drive

PART NO.	A/F mm	PITCH mm	D mm	d mm	L mm	T mm	Weight kg
9TSR-306	6	1	14	25	65	8	0.1
9TSR-308	8	1.25	19	25	65	12	0.13
9TSR-310	10	1.5	22	25	65	14	0.14
9TSR-312	12	1.75	24	25	65	16	0.18
9TSR-314	14	2	24	25	65	18	0.19
9TSR-316	16	2	24	25	65	20	0.17
9TSR-318	18	2.5	30	30	82	20	0.35
9TSR-320	20	2.5	30	30	82	25	0.31
9TSR-322	22	2.5	32	30	82	25	0.35
9TSR-324	24	3	34	30	82	25	0.38
9TSR-327	27	3	40	40	100	28	0.74
9TSR-330	30	3.5	43	40	100	30	0.85
9TSR-333	33	3.5	47	40	100	40	0.85
9TSR-336	36	4	50	40	100	40	1.03
9TSR-339	39	4	54	40	100	40	1.03
9TSR-339 9T :- 9 TORC SR :- Stud Runner 3 :- 1/2" Drive 39 :- A/F							


3/4" Square Drive

PART NO.	A/F mm	PITCH mm	D mm	d mm	L mm	T mm	Weight kg
9TSR-414	14	2	32	44	80	18	0.6
9TSR-416	16	2	32	44	80	20	0.58
9TSR-418	18	2.5	36	44	80	22	0.65
9TSR-420	20	2.5	38	44	80	25	0.65
9TSR-422	22	2.5	40	44	80	25	0.69
9TSR-424	24	3	44	44	80	25	0.73
9TSR-427	27	3	48	44	100	30	1.08
9TSR-430	30	3.5	52	44	100	32	1.25
9TSR-433	33	3.5	55	44	100	36	0.35
9TSR-436	36	4	58	44	110	40	1.62
9TSR-439	39	4	62	44	110	44	1.83
9TSR-439 9T :- 9 TORC SR :- Stud Runner 4 :- 3/4" Drive 39 :- A/F							

1" Square Drive

PART NO.	A/F mm	PITCH mm	D mm	d mm	L mm	T mm	Weight kg
9TSR-520	20	2.5	38	54	100	25	0.96
9TSR-520	22	2.5	42	54	100	25	1.05
9TSR-524	24	3	44	54	100	25	1.07
9TSR-527	27	3	48	54	100	28	1.19
9TSR-530	30	3.5	52	54	100	30	1.3
9TSR-533	33	3.5	57	54	110	38	1.63
9TSR-536	36	4	60	54	110	40	1.79
9TSR-539	39	4	65	54	110	44	2
9TSR-542	42	4.5	68	54	115	47	2.25
9TSR-542 9T :- 9 TORC SR :- Stud Runner 5 :- 3/4" Drive 42 :- A/F							

SLUGGING WRENCH

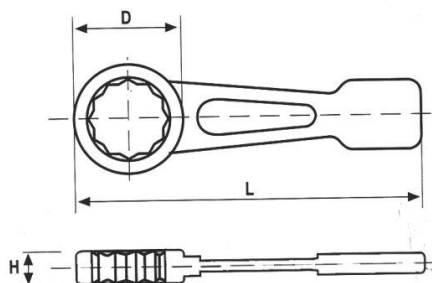

STRAIGHT RING TYPE SLUGGING WRENCH

STRAIGHT RING TYPE WRENCH SIZE

Part No	Size	Size	Head Dia	Head Thk.	Length (mm)
9TSR-19	19		54	18	175
9TSR-19I		3/4"	54	18	175
9TSR-22	22		54	18	175
9TSR-22I		7/8"	54	18	175
9TSR-23I		15/16"	54	18	175
9TSR-24	24		54	18	175
9TSR-25I		1"	54	18	175
9TSR-27	27		54	18	175
9TSR-27I		1.1/16"	54	18	175
9TSR-28I		1.1/8"	54	18	175
9TSR-30	30		68	22	210
9TSR-30I		1.3/16"	68	22	210
9TSR-31I		1.1/4"	68	22	210
9TSR-32	32		68	22	210
9TSR-33I		1.5/16"	68	22	210
9TSR-35I		1.3/8"	68	22	210
9TSR-36	36		68	22	210
9TSR-36I		1.7/16"	68	22	210
9TSR-38I		1.1/2"	68	22	210
9TSR-41	41		80	28	245
9TSR-41I		1.5/8"	80	28	245
9TSR-43I		1.11/16"	80	28	245
9TSR-46	46		80	28	245
9TSR-46I		1.13/16"	80	28	245
9TSR-47I		1.7/8"	80	28	245
9TSR-49I		1.15/16"	80	28	245
9TSR-50	50		80	28	245
9TSR-51I		2"	80	28	245
9TSR-52I		2.1/16"	102	35	285
9TSR-55	55		102	35	285
9TSR-55I		2.3/16"	102	35	285
9TSR-57I		2.1/4"	102	35	285
9TSR-60	60		102	35	285
9TSR-60I		2.3/8"	102	35	285
9TSR-62I		2.7/16"	102	35	285
9TSR-65	65		102	40	322
9TSR-65I		2.9/16"	102	40	322
9TSR-67I		2.5/8"	122	40	322
9TSR-70	70		122	40	322
9TSR-70I		2.3/4"	122	40	322
9TSR-72I		2.13/16"	122	40	322
9TSR-75	75		122	40	322
9TSR-75I		2.15/16"	122	40	322
9TSR-76I		3"	122	40	322
9TSR-79I		3.1/8"	122	40	322
9TSR-80	80		122	40	322
9TSR-85	85		130	40	340
9TSR-86I		3.3/8"	130	40	340
9TSR-88I		3.1/2"	136	45	350
9TSR-90	90		136	45	350
9TSR-95	95		140	45	375
9TSR-95I		3.3/4"	140	45	375

STRAIGHT RING TYPE WRENCH SIZE

Part No	Size	Size	Head Dia	Head Thk.	Length (mm)
9TSR-97I		3.7/8"	158	50	415
9TSR-100	100		158	50	415
9TSR-105	105		164	50	450
9TSR-105I		4.1/8"	164	50	450
9TSR-110	110		170	55	450
9TSR-110I		4.3/8"	170	55	450
9TSR-114I		4.1/2"	175	55	465
9TSR-115	115		175	55	465
9TSR-117I		4.5/8"	190	60	490
9TSR-120	120		190	60	490
9TSR-120I		4.3/4"	190	60	490
9TSR-121I		4.7/8"	200	60	510
9TSR-125I		5"	210	65	515
9TSR-130	130		210	65	515
9TSR-135	135		222	65	540
9TSR-135I		5.3/8"	222	65	540
9TSR-140	140		230	70	550

STRAIGHT RING TYPE WRENCH SIZE

Part No	Size	Size	Head Dia	Head Thk.	Length (mm)
9TSR-145	145		230	70	565
9TSR-145I		5.3/4"	230	70	565
9TSR-150	150		230	70	565
9TSR-155	155		230	70	565
9TSR-155I		6.1/8"	230	70	565
9TSR-160	160		270	70	635
9TSR-165	165		270	70	635
9TSR-165I		6.1/2"	270	70	635
9TSR-170	170		270	70	635
9TSR-175	175		270	70	635
9TSR-175I		6.7/8"	270	70	635
9TSR-180I		7"	270	70	635
9TSR-180	180		270	70	635
9TSR-185I		7.1/4"	295	75	680
9TSR-185	185		295	75	680
9TSR-190	190		295	75	680
9TSR-195	195		295	75	680
9TSR-195I		7.5/8"	295	75	680
9TSR-200	200		295	75	680
9TSR-200I		8"	295	75	680
9TSR-205	205		295	75	680
9TSR-215	215		325	80	725
9TSR-215I		8.1/2"	325	80	725
9TSR-230	230		325	80	725
9TSR-230I		9"	325	80	725

SLUGGING WRENCH



OPEN JAW TYPE SLUGGING WRENCH

Part No	Size	Part No	Head Dia	Size	Head Thk.	Length (mm)
9TSO-19	19			54	18	190
9TSO-19I			3/4"	54	18	190
9TSO-22	22			54	18	190
9TSO-22I			7/8"	54	18	190
9TSO-23I			15/16"	54	18	190
9TSO-24	24			54	18	190
9TSO-25I			1"	54	18	190
9TSO-27	27			54	18	190
9TSO-27I			1.1/16"	54	18	190
9TSO-28I			1.1/8"	54	18	190
9TSO-30	30			54	18	190
9TSO-30I			1.3/16"	54	18	190
9TSO-31I			1.1/4"	80	18	210
9TSO-32	32			80	18	210
9TSO-33I			1.5/16"	80	18	210
9TSO-35I			1.3/8"	80	18	210
9TSO-36	36			80	18	210
9TSO-36I			1.7/16"	80	18	210
9TSO-38I			1.1/2"	80	18	210
9TSO-41	41			110	22	275
9TSO-41I			1.5/8"	110	22	275
9TSO-43I			1.11/16"	110	22	275
9TSO-46	46			110	22	275
9TSO-46I			1.13/16"	110	22	275
9TSO-47I			1.7/8"	110	22	275
9TSO-49I			1.15/16"	110	22	275
9TSO-50	50			110	22	275
9TSO-51I			2"	110	22	275
9TSO-52I			2.1/16"	135	25	325
9TSO-55	55			135	25	325
9TSO-55I			2.3/16"	135	25	325
9TSO-57I			2.1/4"	135	25	325
9TSO-60	60			135	25	325
9TSO-60I			2.3/8"	135	25	325
9TSO-62I			2.7/16"	150	32	362
9TSO-65	65			150	32	362
9TSO-65I			2.9/16"	150	32	362
9TSO-67I			2.5/8"	150	32	362
9TSO-70	70			150	32	362
9TSO-70I			2.3/4"	150	32	362
9TSO-72I			2.13/16"	172	36	405
9TSO-75	75			172	36	405
9TSO-75I			2.15/16"	172	36	405
9TSO-76I			3"	172	36	405
9TSO-79I			3.1/8"	172	36	405
9TSO-80	80			172	36	405
9TSO-85	85			180	38	430
9TSO-86I			3.3/8"	180	38	430
9TSO-88I			3.1/2"	195	40	455
9TSO-90	90			195	40	455
9TSO-95	95			195	40	455
9TSO-95I			3.3/4"	195	40	455



OPEN TYPE SLUGGING WRENCH

MANUAL TORQUE WRENCH



MANUAL TORQUE WRENCH


MANUAL TORQUE WRENCH

MODEL NO.		TORQUE WRENCH				SQUARE DRIVE	OVERALL LENGTH	UNIT WEIGHT
Non-Ratcheting	Ratcheting	N.m	Kgf.m	Lbf.in	Lb.ft	Inches	mm	kg
9TWT-100	9TWTR-100	2.5-11	0.3-1.1	20-100	2.0-8.0	3/8"	320/360	0.65
9TWT-300	9TWTR-300	5.0-35	0.5-3.5	40-300	4.0-25	3/8"	430/465	0.85
9TWT-600	9TWTR-600	12.0-68	1.2-7	100-600	10.0-50	1/2"	485/530	1.5
9TWT-1200	9TWTR-1200	25-135	3.0-14	200-1200	20-100	1/2"	545/595	2
9TWT-2000	9TWTR-2000	50-225	5.0-23	400-2000	40-160	1/2"	610/660	3
9TWT-3000	9TWTR-3000	70-330	7.0-35	600-3000	50-250	1/2"	835/890	4
9TWT-5000	9TWTR-5000	140-560	14-57	1200-5000	00-140	3/4"	1120/1195	7
9TWT-7200	9TWTR-7200	135-780	14-78	1200-4800	100-500	3/4"	1110/1195	7
9TWT-7S	9TWTR-7S	200-810	20-82	1770-7169	150-600	3/4"	1110/2100	8.5
9TWT-8400	9TWTR-8400	480-940	49-95	350-700	350-700	1"	1400/1485	12
9TWT-8	9TWTR-8	475-1050	49-105	1200-6640	350-750	3/4"	1390/1480	15
9TWT-9	9TWTR-9	540-1380	55-140	4200-9300	400-1000	1"	1305/1340	18
9TWT-10	9TWTR-10	1000-1900	105-195	4800-12250	750-1400	1"	1305/1340	18
9TWT-11	9TWTR-11	1350-2700	135-275	11950-24000	1000-2000	1"	1450/1530	20.6

MANUAL TORQUE WRENCH



MANUAL TORQUE MUTIPLIER

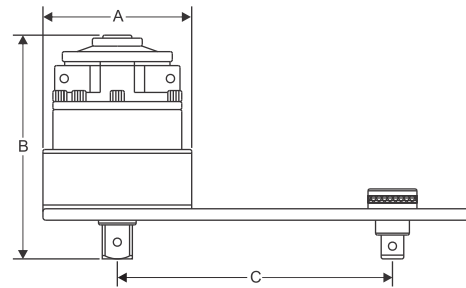

MANUAL TORQUE MUTIPLIER

MANUAL TORQUE MULTIPLIER

HAND TORQUE MODEL NO.	MAXIMUM OUTPUT TORQUE			ESTIMATED CAPACITY (S. QUALITY)		MULTI- PLICATION FACTOR	FEMALE OUTPUT SQUARE	MALE OUTPUT SQUARE	MAJOR DIA A	DEPTH B	MIN C	MAX C	APPROX WEIGHT WITH REACTION PLATE (kg)
	lb-ft	N-m	Kgf.m	In	mm		In	In	mm	mm	mm	mm	
9TM-1	1250	1700	170	1.1/8"	27	5	1/2"	3/4"	115	87	75	164	4.5
9TM-2	1250	1700	170	1.1/8"	27	5	3/4"	1	115	90	75	164	5
9TM-2/25	1250	1700	170	1.1/8"	27	25	1/2"	1	115	120	75	164	7
9TM-5	2000	2700	275	1.3/8"	36	5	3/4"	1	136	135	89	260	11
9TM-5/25	2000	2700	275	1.3/8"	36	25	1/2"	1	136	163	89	260	11
9TM-6	2500	3400	345	1.1/2"	38	5	3/4"	1.1/2	136	149	105	260	8.5
9TM-6/25	2500	3400	345	1.1/2"	38	25	1/2"	1.1/2	136	176	105	260	11.5
9TM-7	4500	6000	622	1.7/8"	48	5	3/4"	1.1/2	168	174	115	310	18
9TM-7/25	4500	6000	622	1.7/8"	48	25	1/2"	1.1/2	168	226	115	310	22
9TM-9/25	7000	9500	965	2.1/4"	56	25	3/4"	1.1/2	195	256	150	350	33
9TM-9/125	7000	9500	965	2.1/4"	56	125	1/2"	1.1/2	195	301	150	350	35.5
9TM-11/25	12500	17000	1735	3.3/4"	95	25	3/4"	2.1/2	220	360	164	480	52
9TM-11/125	12500	17000	1735	3.3/4"	95	125	1/2"	2.1/2	220	404	164	480	57



SLIM TYPE MANUAL TORQUE MUTIPLIER

SLIM TYPE MANUAL TORQUE MULTIPLIER

MODEL NO	Gear Ratio	Torque Capacity Max.		Height mm (C)	Diameter mm (D)	Weight Kgs.	Input Drive (A)	Output Drive (B)	Suitable for Bolt Size	
		Ft.lbs	Nm						Thd.Size	A/F
9TSM: 15	4.5:1	1000	1355	175	80	3	3/4"	1"	M16-M27	24-41
9TSM: 25	12:1	1350	1630	310	80	5.2	3/4"	1"	M20-M30	30-46
9TSM: 35	15:1	2125	2880	285	80	5.1	3/4"	1"	M20-M36	30-35
9TSM: 40	15:1	2360	3200	245	95	6.1	3/4"	1.1/2"	M20-M39	30-60
9TSM: 65	21:1	3660	4960	240	114	8.4	3/4"	1.1/2"	M27-M42	41-65
9TSM: 90	40:1	5075	6880	300	172	21.5	3/4"	1.1/2"	M33-M48	50-75



☎ +91 - 90046 03489
+91 - 83558 75670

✉ Info@torquingtools.com

🌐 www.torquingtools.com

📍 Shop No.3, Dwarkamai Complex,
Tilak College Road, Nr. Gharda Circle,
Rohidas Nagar, Azdepada,
Dombivli East.

